HANDOVER DOCUMENT

iSaahasi Academy India Foundation Website Owner's Guide

How your website works, which outside services run it, what they cost, and where to look for what.

Prepared for:	iSaahasi Academy India Foundation (website owner)
Prepared by:	Website development team
Document date:	11 November 2026
Written for:	Non-technical staff, trustees and volunteers

Note for the person preparing this PDF. Grey dashed boxes marked **SCREENSHOT n** are placeholders. Take each screenshot as described, paste it into the box, and delete the instruction lines if you wish. A full checklist is in Section 12. **Before taking any screenshot, hide secret keys, PAN numbers, donor emails and phone numbers** (see Section 11).

Contents

1. The big picture in one page
2. What visitors can do on the website
3. What happens when someone donates (step by step)
4. The outside services — who does what
5. What it costs (and a worked example)
6. Where to look for what (quick reference)
7. Service-by-service tutorial with screenshots: Razorpay, Google Sheets, Resend, Vercel
8. Everyday tasks (how-to)
9. When something goes wrong
10. Before going live — the launch checklist
11. Security and privacy — what to protect
12. Screenshot checklist (everything to capture)
13. Account ownership register (to fill in)


1. The big picture in one page

Your website is a normal public website, with a small "back office" behind it that takes donations, saves form submissions and emails receipts. **There is no separate admin panel to log in to on the website itself.** Instead, you manage things through four outside services, each with its own login:

Service	In plain words	You log in to…
Razorpay	Takes the money (UPI, cards, net banking) and pays it into the NGO's bank account.	Razorpay Dashboard
Google Sheets	Your "database". Every form submission and payment record appears as a row in a spreadsheet.	Google Drive / Sheets
Resend	Sends the donation receipt PDF to the donor by email.	Resend Dashboard
Vercel	The "landlord" — hosts the website, runs the back office, stores the secret settings, runs the daily monthly-receipt job.	Vercel Dashboard

Smaller items: **Google Fonts** (free fonts shown on pages) and your **domain name** (your website address, bought from a registrar).

How the pieces connect

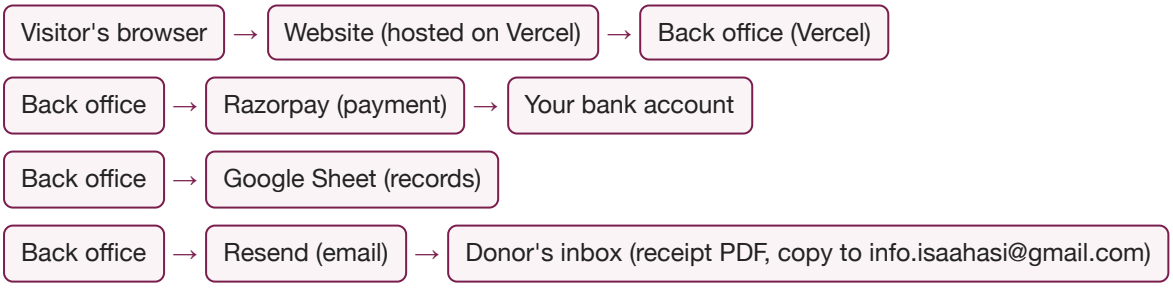

> **The most important thing to remember:** the **money** lives in Razorpay and your bank. The **records** live in Google Sheets. The **receipts** go out through Resend. The **website itself** runs on Vercel. If something looks wrong, ask first: "which of these four?" — Section 6 tells you where to look.

SCREENSHOT 1 **Website home page**

Where	Open your live website address in a browser.
Capture	The full top of the Home page including the menu and the Donate button.
Highlight	Draw a box around the Donate button.

Paste screenshot here

2. What visitors can do on the website

Page	Address	What it is / what happens
Home	`/`	Main page with the Donate button and a **newsletter sign-up** ("For news and updates"). Newsletter emails go to the **Newsletter** tab of the Google Sheet.
Our Story	`/our-story`	Information page (static text and images).
Our Team	`/our-team`	Team members (static).
Her Story	`/her-story`	Beneficiary stories (static).
Our Work	`/our-work`	Programmes: education, health, employment, community (static).
Vision	`/vision`	Vision page (static).
Updates	`/updates`	News and event updates (static).
Partner	`/partner`	**Form** — organisations who want to partner / sponsor. Goes to the **Partner** tab.
Volunteer	`/volunteer`	**Form** — people who want to volunteer. Goes to the **Volunteer** tab.
Reports & Compliance	`/compliance`	Downloadable PDFs (annual returns MGT-7 for 2020-21 to 2024-25).
Careers	`/careers`	Static page that currently says the organisation is not hiring.
Privacy Policy	`/privacy-policy`	Static legal text.

> **"Static" means** the text and pictures are part of the website's code. To change the words or photos on a static page, the developer must update the code and publish again (Section 8). Only the items in **bold** (forms, donations, compliance list) produce data you manage yourself.

Footer information shown to the public

- Email isaahasiindia@gmail.com · Phone +91 9920852249
- Registered under Section 8(1) of the Companies Act 2013 (CIN U93090MH2016NPL284468) and Section 80G; part of International Sanctuary.
- Instagram and LinkedIn icons are currently **placeholders** (they do not open your real profiles yet) and "Terms of Use" is plain text, not a link. See Section 11.

SCREENSHOT 2 **Volunteer form and Partner form**

Where /volunteer and /partner pages.

Capture One screenshot of each form (empty).

Paste screenshot here

3. What happens when someone donates

The donation window (opened by any Donate button) has two tabs: **DONATE ONCE** and **DONATE MONTHLY**. The donor picks ₹500, ₹1,000, ₹5,000 or types any amount, and fills in: Full Name, Email, Mobile (+91), Address, Nationality (Indian / not Indian) and PAN (checked for correct format).

A. One-time donation

1. Donor fills the form and presses Donate. The website asks Razorpay to create an **order**.
2. The Razorpay payment window opens (UPI, card, net banking, wallets).
3. Donor pays. Razorpay sends a signed confirmation back.
4. The back office **checks the signature** (this prevents fake "paid" claims).
5. A **receipt PDF** is made on your receipt template (with the authorised signature) and emailed by Resend to the donor, copied to `info.isaahasi@gmail.com`. Subject: "Your donation receipt — RCPT-…".
6. The donor sees: "Your donation was successful. A confirmation has been sent to your email and mobile number."
7. A record is added to the **Payments** tab of the Google Sheet.

B. Monthly donation

1. Donor chooses DONATE MONTHLY, fills the form and approves a **recurring payment** in Razorpay's window (card or UPI AutoPay / e-mandate).
2. The first month is charged immediately. The back office adds a row to the **Live Subscriptions** tab and sends the first receipt straight away.
3. Razorpay charges the donor automatically every month (set up to run up to 120 months ≈ 10 years, unless cancelled).
4. Every day at about **9:00 AM IST** an automatic job on Vercel (the "cron job") checks every live subscription, finds any month that was paid but not yet receipted, emails the receipt ("Your monthly donation receipt — installment #N") and records it in **Payments**.
5. When a subscription is cancelled/completed/expired, its row is automatically removed from **Live Subscriptions** (the history stays in **Payments** and in Razorpay).

> **So:** a monthly donor's receipt for months 2, 3, 4… arrives by email within about a day of the charge. It is automatic; nobody has to do anything.

Sheet tab	What it contains
Volunteer	Timestamp, Full Name, Email, Mobile Number, Message
Partner	Timestamp, Full Name, Organisation Name, Email, Mobile Number, Message
Newsletter	Timestamp, Email
Payments	One row per payment: record ID, time, donor name/email/mobile, donation type (one-time / monthly), amount, currency, Razorpay order / payment / subscription IDs, status
Live Subscriptions	Working list for the daily job: subscription ID, donor, amount, Razorpay status, receipts already sent, created / last-checked time. **Please do not edit this tab by hand.**

SCREENSHOT 3 **The donation window — "Donate once" tab**

Where Click Donate on the live site.

Capture The open window showing amount buttons and the form fields (leave empty).

Paste screenshot here

SCREENSHOT 4 **The donation window — "Donate monthly" tab**

Capture Same window with the monthly tab selected.

Paste screenshot here

SCREENSHOT 5 **A sample receipt email and the receipt PDF**

Where Make a small test donation (Section 8 explains test mode) or use an existing donor's copy in info.isaahasi@gmail.com.

Capture The email in the inbox, and the opened PDF receipt.

Hide Donor name, email and phone (unless it's your own test).

Paste screenshot here

4. The outside services — who does what

4.1 Razorpay — payments

- **Does:** shows the payment window, collects the money, settles it to the NGO bank account, runs the monthly auto-debits, issues refunds.
- **You use it to:** see every payment, check settlements into the bank, refund a donation, cancel a monthly subscription, download reports for your accountant.
- **Two modes: Test** (pretend money, for practice) and **Live** (real money). A toggle at the top of the dashboard switches between them. The website must use Live keys to take real donations.
- **Needs from the NGO:** completed KYC (PAN, bank account, registration documents) — done through Razorpay's own dashboard.

4.2 Google Sheets & Google Cloud — the records

- **Does:** stores every volunteer, partner, newsletter and payment record in one Google Spreadsheet.
- **Behind the scenes:** a Google Cloud "service account" (a robot Google user) writes to the sheet. **The sheet must stay shared with that robot's email as Editor** — if you remove it, no forms or payments will be saved.
- **You use it to:** read enquiries, export to Excel, follow up with volunteers and partners, reconcile donations.

4.3 Resend — emails

- **Does:** delivers the receipt email with the PDF attached, from your own domain.
- **You use it to:** check whether a particular receipt was delivered, bounced, or never sent.
- **Needs:** your domain verified inside Resend (a one-time DNS setup by whoever manages the domain).

4.4 Vercel — hosting and the "engine room"

- **Does:** serves the website to visitors, runs the back-office code, stores the secret settings (keys and passwords) safely, and runs the daily receipt job.
- **You use it to:** see if the latest version is live, read error logs, check the daily job ran, update a setting, see usage and billing.
- The project is called `isaahasi-frontend`.

4.5 Smaller items

- **Google Fonts** — free; the browser loads the typefaces from Google. Nothing to manage.
- **Domain name** — your website address is rented yearly from a registrar (GoDaddy, BigRock, Namecheap, etc.). It must be renewed, or the site goes offline. Your registrar's DNS settings also hold the records that let Resend send email from your domain.
- **Source code (GitHub or similar)** — where the website's code is stored. Keep ownership with the NGO, not an individual.

5. What it costs

Prices checked on 11 November 2026 from each company's public pricing page. Companies change prices — always re-check the linked pages (razorpay.com/pricing, resend.com/pricing, vercel.com/pricing) before budgeting. Amounts in USD are charged by the company in dollars; your bank/card converts them.

Service	Plan you need	Fixed cost	Variable cost
Razorpay	Standard	₹0 setup, ₹0 annual fee, ₹0 for refunds	**2%** of each successful domestic payment (UPI, cards, net banking, wallets) **+ 18% GST on that fee**. Corporate credit cards 2.15%. International cards up to 3% + GST. **Monthly (subscription) card payments: an extra 0.9% per payment**. UPI/e-mandate subscription pricing is "on request" — confirm with Razorpay.
Resend	Free is enough for now	Free: 3,000 emails/month, max 100 per day. Pro: $20/month for 50,000 emails	None on Free. On Pro, extra emails cost about $0.90 per 1,000.
Vercel	**Pro** recommended	Hobby $0 (but "personal, non-commercial use" only). Pro **$20/month** per user, includes $20 usage credit	Only if you exceed included usage; you can set a spending limit.
Google Sheets / Cloud	Free	₹0 at this volume	None expected.
Google Fonts	Free	₹0	—
Domain name	—	Yearly renewal — **amount unknown to us; check your registrar**	—

Why we recommend Vercel Pro: the free Hobby plan is for personal, non-commercial use and has hard limits. A website that collects donations and runs a daily job is better placed on Pro. Cost: about $20 per month (roughly ₹1,700–1,800 depending on the exchange rate). Ask Vercel whether any non-profit discount is available — we have not verified one.

Worked example: what the NGO actually receives

Donation	Razorpay fee (2%)	GST on fee (18%)	Total deducted	Arrives in bank
₹500 one-time	₹10.00	₹1.80	₹11.80	**₹488.20**
₹1,000 one-time	₹20.00	₹3.60	₹23.60	**₹976.40**
₹5,000 one-time	₹100.00	₹18.00	₹118.00	**₹4,882.00**
₹1,000 monthly, *by card* (2% + 0.9% = 2.9%)	₹29.00	₹5.22	₹34.22	**₹965.78**

Illustrative only. The monthly-card line assumes the 0.9% subscription charge adds to the standard 2%; UPI AutoPay pricing may differ. Your actual deductions are always shown in the Razorpay Dashboard → Settlements / Payments. Money normally reaches the bank the next working day (T+1).

Rough yearly picture

- Fixed: Vercel Pro ≈ $240/year + domain renewal. Resend and Google: ₹0 while within the free limits.
- Variable: about 2.36% of donations (2% + GST), a little more on monthly card donations.

> **Watch the Resend free limit.** Free allows **100 emails per day** and 3,000 per month. A big fundraising day (e.g. 150 donors) would exceed 100 emails and later receipts would fail to send until the next day. Upgrade to Resend Pro ($20/month) before planning a campaign.

6. Where to look for what

I want to know…	Go to	Exactly where
Did a donation come in? How much? Which method?	Razorpay	Dashboard → Transactions → Payments (switch to **Live** mode)
When will the money reach the bank?	Razorpay	Dashboard → Transactions → Settlements
What fee was charged?	Razorpay	Click a payment → Fee and GST are shown; or Reports
List of monthly donors, their status	Razorpay	Dashboard → Subscriptions (status: Active, Halted, Cancelled…)
Donor's name, address, nationality, PAN	Razorpay / Google Sheet	Razorpay: open the payment → **Notes**. Sheet: **Payments** tab
A simple list of all donations for Excel	Google Sheet	**Payments** tab → File → Download → .xlsx / .csv
Who wants to volunteer?	Google Sheet	**Volunteer** tab
Which organisations want to partner?	Google Sheet	**Partner** tab
Newsletter subscribers	Google Sheet	**Newsletter** tab
Did the donor get the receipt email?	Resend	Dashboard → Emails (Logs) → search the donor's email → status Delivered / Bounced
How many emails sent this month? Near the limit?	Resend	Dashboard → Usage (or Emails list)
Is the website live? Latest update published?	Vercel	Project `isaahasi-frontend` → Deployments
Did the daily monthly-receipt job run?	Vercel	Project → Settings → Cron Jobs (status/last run) and Logs
An error message / something failed	Vercel	Project → Logs (Runtime Logs), filter by "Error"
Change a secret key/setting	Vercel	Project → Settings → Environment Variables
Hosting bill / usage	Vercel	Team → Settings → Billing / Usage
Domain renewal date	Registrar	The registrar's website (see Section 13)
Add a compliance PDF to the site	Developer	See Section 8, task D

7. Service-by-service tutorial

For each service, log in and take the screenshots shown. Each screenshot box tells you what to open and what to highlight.

7.1 Razorpay

Login: **dashboard.razorpay.com**. Always check the **Test / Live** switch at the top of the page — real donations are only visible in **Live**.

SCREENSHOT 6 **Razorpay home with Test/Live toggle**

Open	dashboard.razorpay.com after login.
Highlight	The Test/Live mode switch and the left menu.
Hide	Account email, balances if you prefer.

Paste screenshot here

SCREENSHOT 7 **Payments list**

Open	Transactions → Payments.
Highlight	Columns for Amount, Status (Captured), Method, Date.
Hide	Customer names, emails, phones.

Paste screenshot here

SCREENSHOT 8 **One payment's detail page (with Notes)**

Open	Click any payment.
Highlight	Fee & GST lines; the **Notes** section (donor address, nationality, PAN).
Hide	**PAN, address, email, phone — blur all.**

Paste screenshot here

SCREENSHOT 9 **Settlements**

Open	Transactions → Settlements.
Highlight	Settlement date and amount.
Hide	Bank account digits.

Paste screenshot here

SCREENSHOT 10 **Subscriptions list**

Open Subscriptions (under Payments products / left menu).

Highlight Status column; the "Cancel" action inside a subscription.

Hide Donor details.

Paste screenshot here

SCREENSHOT 11 **Refund button**

Open Inside a payment detail page.

Highlight The "Refund" button. (Do not click it.)

Paste screenshot here

SCREENSHOT 12 **API keys page (to show where keys live — NOT their values)**

Open	Account & Settings → API Keys.
Capture	The page layout only.
Hide	**Completely cover the Key ID and Key Secret.**

Paste screenshot here

7.2 Google Sheet

Open the spreadsheet from Google Drive (it is owned by the NGO's Google account). It has five tabs along the bottom.

SCREENSHOT 13 **The sheet's tabs**

Capture	Bottom of the sheet showing the tabs Volunteer / Partner / Newsletter / Payments / Live Subscriptions.

Paste screenshot here

SCREENSHOT 14 **Payments tab with a few rows**

Highlight Header row and the Donation Type, Amount, Payment Status columns.

Hide Names, emails, mobiles.

Paste screenshot here

SCREENSHOT 15 **Volunteer tab with a few rows**

Hide Names, emails, phones.

Paste screenshot here

SCREENSHOT 16 **Share dialog showing the robot (service account) as Editor**

Open Share button (top right).

Highlight The address ending in `iam.gserviceaccount.com` with role Editor. **It must never be removed.**

Paste screenshot here

SCREENSHOT 17 **How to download as Excel**

Open File → Download → Microsoft Excel (.xlsx).

Capture The menu open.

Paste screenshot here

7.3 Resend

Login: **resend.com**.

SCREENSHOT 18 **Emails (Logs) list**

Open Left menu → Emails.

Highlight Status column (Delivered), subject "Your donation receipt — RCPT-…".

Hide Recipient addresses.

Paste screenshot here

SCREENSHOT 19 **One email's detail page**

Highlight Delivery timeline (Sent → Delivered) and the attachment.

Paste screenshot here

SCREENSHOT 20 **Domains page**

Open Left menu → Domains.

Highlight Your domain showing **Verified**.

Paste screenshot here

SCREENSHOT 21 **Usage / plan page**

Open Settings → Billing or Usage.

Highlight Current plan and emails used today / this month.

Paste screenshot here

SCREENSHOT 22 **API Keys page (layout only)**

Hide **Any key value.**

Paste screenshot here

7.4 Vercel

Login: **vercel.com**. Open project `isaahasi-frontend`.

SCREENSHOT 23 **Project overview**

Highlight The "Visit" button (your live site) and the latest deployment status (Ready).

Paste screenshot here

SCREENSHOT 24 **Deployments list**

Highlight The "Production" tag and a "Ready" status. Explain: each update to the site creates a new row here.

Paste screenshot here

SCREENSHOT 25 **Logs (Runtime Logs)**

Open	Project → Logs.
Highlight	The filter for errors; a line from `/api/payments/verify-payment`.
Hide	Any personal data in log lines.

Paste screenshot here

SCREENSHOT 26 **Cron Jobs**

Open	Project → Settings → Cron Jobs.
Highlight	The path `/api/cron/send-subscription-receipts`, schedule `30 3 * * *` (= 9:00 AM IST daily), and the "Run" button.

Paste screenshot here

SCREENSHOT 27 **Environment Variables page**

Open Project → Settings → Environment Variables.

Capture The list of **names** only.

Hide **Never click "reveal"; all values must stay hidden.**

Paste screenshot here

SCREENSHOT 28 **Billing / plan page**

Open Team settings → Billing.

Highlight The plan (Pro) and the spending limit setting.

Paste screenshot here

SCREENSHOT 29 **Domains page**

Open Project → Settings → Domains.

Highlight The domain showing "Valid Configuration".

Paste screenshot here

The settings (environment variables) the site needs

These are the names of the secret settings stored in Vercel. **Values are never written in this document.**

Name	What it is for	Where the value comes from
`RAZORPAY_KEY_ID` / `VITE_RAZORPAY_KEY_ID`	Public payment key (the second is the copy shown to the browser)	Razorpay → API Keys (Live)
`RAZORPAY_KEY_SECRET`	Private payment key	Razorpay → API Keys (shown once!)
`RAZORPAY_WEBHOOK_SECRET`	Verifies messages sent by Razorpay	Razorpay → Webhooks
`GOOGLE_SERVICE_ACCOUNT_EMAIL`, `GOOGLE_SERVICE_ACCOUNT_PRIVATE_KEY`	The robot's identity for writing to the sheet	Google Cloud → Service Accounts
`GOOGLE_SHEETS_SPREADSHEET_ID`	Which spreadsheet to write into	The long ID in the sheet's web address
`RESEND_API_KEY`, `RESEND_FROM_EMAIL`	Permission to send email, and the "from" address	Resend → API Keys / Domains
`CRON_SECRET`	A password that only Vercel's scheduler knows, so strangers cannot trigger the daily job	Made up by the developer, stored in Vercel

After changing any setting in Vercel you must **redeploy** (Deployments → ⋯ → Redeploy) for the change to take effect.

8. Everyday tasks

A. Check today's donations (2 minutes)

1. Razorpay → switch to **Live** → Transactions → Payments → filter Status = Captured.
2. Optionally cross-check the **Payments** tab in the Google Sheet.

B. Cancel a monthly donor's subscription (on their request)

1. Razorpay → Subscriptions → search the donor/subscription ID.
2. Open it → **Cancel subscription** (choose "cancel immediately" or "at end of current cycle").
3. No further charges happen. The row disappears from **Live Subscriptions** on the next daily run.

C. Refund a donation

1. Razorpay → Payments → open the payment → **Refund** → full or partial. Razorpay does not charge a fee for the refund itself (but the original fee is generally not returned — confirm with Razorpay).
2. Note: refunds are not emailed by our system; inform the donor yourself.

D. Add a new compliance document to the website

This needs the developer (or someone comfortable with the code), because the list is part of the website:

1. Put the PDF file in the folder `public/compliance/`.
2. Open `src/data/complianceDocuments.ts` and add one line `{ name: "…", file: "…pdf" }` in the right section, newest first.
3. Publish (push to the main branch); Vercel automatically rebuilds the site in about a minute.
4. Check on the live `/compliance` page that the file opens.

E. Publish a change to the website

Changes to text, images or pages are made in the code by the developer and uploaded to the code repository. Vercel notices and publishes automatically. Watch it under Vercel → Deployments (Building → Ready). If a deployment fails, the previous good version stays live.

F. Practise with test mode

- Razorpay Test mode uses separate "test" keys and fake money — nothing is charged.
- Use Razorpay's published test card/UPI details from their documentation.
- The site shows test or live behaviour depending on which keys are saved in Vercel — **do not leave test keys in production**.

G. Run the monthly-receipt job right now (if you don't want to wait until morning)

Easiest: Vercel → Project → Settings → Cron Jobs → click **Run** next to `send-subscription-receipts`. The developer can alternatively call the endpoint with the CRON_SECRET. The result shows counts such as `processed`, `receiptsSent`, `failed`. Running it twice is safe: a receipt is never emailed twice.

H. Download a report for audit / accountant

1. Razorpay → Reports → choose Payments / Settlements and a date range → download.
2. Google Sheet → Payments tab → File → Download → Excel.

SCREENSHOT 30 **Razorpay subscription → Cancel button**

Open Any subscription detail page.

Highlight Cancel Subscription. (Do not click.)

Paste screenshot here

SCREENSHOT 31 **Razorpay Reports page**

Highlight Report type and date range selectors, Download button.

Paste screenshot here

9. When something goes wrong

Problem	Likely cause	What to do
Donor paid but did not get a receipt	Email in spam, typo in email, Resend daily limit hit, or email failed after payment (the payment itself is still safe)	1) Ask them to check spam. 2) Resend → Emails → search their address. 3) If missing, check Vercel Logs for errors around that time. 4) Ask the developer to resend the receipt. Money is safe in Razorpay.
Monthly donor says no receipt for this month	Daily job hasn't run yet, or job error	Vercel → Cron Jobs → Run. Check Logs. Check Resend.
Donor's money was deducted but the site showed an error	Browser closed / network drop	Check Razorpay Payments. If status is **Captured**, the money is yours; send a receipt manually via the developer. If **Failed**/**Authorized**, the bank will auto-refund within 5–7 working days.
Form submissions are not appearing in the sheet	Sheet no longer shared with the robot, tab renamed, or wrong sheet ID	Check Share dialog (Screenshot 16), tab names exactly as in Section 3, then Vercel logs.
Donate button shows a payment error	Test/Live keys mixed up, or keys expired	Check the Razorpay keys in Vercel Environment Variables match Live mode; redeploy.
Whole website not loading	Domain expired, or Vercel account/billing problem	Check domain renewal at the registrar, then Vercel billing and Deployments.
Emails not sending at all	Resend domain no longer verified, or API key revoked	Resend → Domains (should be Verified), API Keys.

10. Launch checklist (before real donations)

> Tick each item. Any unticked item can mean lost donations or missing receipts.

✓	Item
☐	Razorpay KYC approved and **Live mode** activated.
☐	Live `RAZORPAY_KEY_ID`, `VITE_RAZORPAY_KEY_ID` and `RAZORPAY_KEY_SECRET` saved in Vercel **Production** environment (not test keys).
☐	Live-mode **webhook** created in Razorpay pointing to `/api/razorpay/webhook` with its secret saved as `RAZORPAY_WEBHOOK_SECRET` (note: monthly receipts do not depend on it, but payment records do).
☐	`CRON_SECRET` set in Vercel Production; the cron job appears under Settings → Cron Jobs.
☐	Google Sheet has all five tabs with the exact header names; shared with the service-account email as **Editor**.
☐	Resend domain **Verified**; `RESEND_FROM_EMAIL` uses that domain; `RESEND_API_KEY` saved.
☐	Vercel plan upgraded to **Pro** (commercial use) with a spending limit.
☐	Make one real ₹1 / small one-time donation and one monthly donation; confirm: payment in Razorpay, row in Payments, receipt email received, copy at info.isaahasi@gmail.com. Then cancel the test subscription and refund.
☐	Real Instagram and LinkedIn links put in the footer; "Terms of Use" page created or the text removed.
☐	Debug endpoint removed (see Section 11).
☐	Account ownership register (Section 13) filled in and passwords stored safely.

11. Security and privacy — what to protect

Rules for everyone

- **Never** email or WhatsApp secret keys, passwords or the Razorpay Key Secret. Never post them in screenshots.
- Turn on **two-step verification** on Razorpay, Google, Resend, Vercel, your domain registrar and the code repository.
- Use accounts owned by the **NGO** (a shared office email like info@…), not a single person's private email, so access survives staff changes.
- Donor PAN, address and phone are **personal data**. Limit the Google Sheet's sharing to the few people who need it; remove access when someone leaves.

Points to fix or be aware of (for the developer and the board)

#	Issue	Recommendation
1	**A "debug-env" page is publicly reachable** at `/api/debug-env`. It lists the names and lengths of the secret settings (not the values) to anyone who visits.	**Delete it before launch.** It leaks information useful to attackers.
2	PAN and address are stored in Razorpay's "notes" and in the Sheet.	Keep access restricted; consider whether storing PAN is needed beyond tax-receipt purposes; follow India's DPDP Act obligations (consent, purpose, deletion on request).
3	Resend is a US company and keeps email logs for about 30 days on the free plan (receipts, which contain donor names).	Mention this in the Privacy Policy; DPDP considerations apply to cross-border processing.
4	Receipt PDFs are not password-protected.	Acceptable for receipts; just be aware an email forwarded can be read by anyone.
5	The Razorpay webhook cannot be reliably edited on the existing dashboard setup, so payment records in the Sheet may miss entries from some events.	Use the Razorpay Dashboard as the source of truth for money; the Sheet is a convenience copy. Set up a Live webhook properly at launch.
6	One Razorpay "plan" is created for every monthly donation.	Harmless but clutters Razorpay → Plans. A future improvement can reuse plans per amount.
7	Instagram/LinkedIn icons in the footer do not go anywhere; "Terms of Use" is not clickable.	Add real links/page.
8	Vercel Hobby plan is non-commercial.	Use Pro (Section 5).

If you suspect a secret key was exposed (posted in chat, in a screenshot, in a public place): in Razorpay → API Keys, **regenerate** the key; update it in Vercel; redeploy. Do the same for Resend and Google keys.

12. Screenshot checklist

Tick when captured. Total: **31 screenshots**.

No.	What	Section	Done
1	Website home page, Donate button boxed	1	☐
2	Volunteer and Partner forms	2	☐
3–4	Donation window: once / monthly	3	☐
5	Receipt email and PDF	3	☐
6–12	Razorpay: home toggle, payments, payment detail, settlements, subscriptions, refund, API keys page	7.1	☐
13–17	Google Sheet: tabs, Payments, Volunteer, Share dialog, download menu	7.2	☐
18–22	Resend: emails list, email detail, domains, usage, API keys page	7.3	☐
23–29	Vercel: overview, deployments, logs, cron, env variable names, billing, domains	7.4	☐
30–31	Razorpay cancel button, Reports page	8	☐

How to hide sensitive information in a screenshot

- **Mac:** Cmd+Shift+4 to capture; open in Preview → Markup (pen icon) → draw a **solid black rectangle** over sensitive text → Export. (Do not just blur lightly; use solid black.)
- **Windows:** Win+Shift+S to capture; paste into Paint or Snipping Tool and draw a filled black box.
- Always cover: API keys and secrets, PAN, full email addresses, phone numbers, bank account numbers, donor names.
- Prefer a **test payment made by yourself** as the sample, so no real donor appears.

13. Account ownership register

Fill this in by hand and keep the passwords in a proper password manager (not in this document).

Service	Website	Account owner email	2-step on?	Renewal / billing date
Razorpay	dashboard.razorpay.com			—
Google (Sheet & Cloud)	drive.google.com · console.cloud.google.com			—
Resend	resend.com			
Vercel	vercel.com			
Domain registrar				
Code repository				—
Developer contact	—		—	—

Useful contacts

- NGO public contact: isaahasiindia@gmail.com · +91 9920852249
- Receipt copies arrive at: info.isaahasi@gmail.com
- Razorpay support: via the "Help" icon in the Razorpay dashboard
- Resend and Vercel support: via their dashboards

Glossary

Deployment	One published version of the website.
Cron job	A task that runs automatically on a schedule (here, daily at 9:00 AM IST).
Webhook	An automatic message that Razorpay sends to the website when something happens.
Environment variable	A secret setting (key/password) stored in Vercel, not in the code.
Service account	A robot Google identity the website uses to write into your Sheet.
Settlement	Razorpay paying collected money into your bank account.
Subscription / Plan	A recurring monthly donation arrangement, and the amount template behind it.
T+1	Money reaches the bank one working day after the payment.

End of document. Prices and screen layouts of third-party services change over time; if a button has moved, use the service's search or Help.